



Wall Products International, INC.

201 NE 21st St, Fort Worth, Tx 76164

phone: 800.446.7124 or 817.626.1987

fax: 817.626.0821

www.murcowall.com email: murco@murcowall.com

SPECIFICATION AND DATA SHEET

PRODUCT NAME:

Murco M 100 Hypo Allergenic Joint Compound

MANUFACTURER:

Murphy Wall Products International, Inc.
201 NE 21st St, Fort Worth, Tx, 76164
800.446.7124

ADVANTAGES:

- Easy mixing
- Less odor
- No toxic emissions
- Easy cleanup

PRODUCT DESCRIPTION:

An easy mixing, powdered all purpose joint compound and texture formulated with no VOC's preservatives, fungicides or petroleum products. It is made with only inert fillers and natural binders. It contains no slow releasing compounds and mixes easily with tap water. It is designed for interior walls and ceilings that are to be painted.

SURFACES PREPARATION:


Surface must be clean and dry. Prime metal and tie wires etc. with rust inhibitive primer. Stained or smoked wall-boards should be primed with stain killing primer. Fill and seal wood surfaces. Concrete ceilings: remove oils, grease, and efflorescence of other deposits. A good quality high solid drywall surface preparation primer is recommended before texturing.

MIXING:

To each bag of M 100, add approximately 1 1/2 gallons of clean water and mix until product reaches a stiff consistency, approximately 5 minutes with a mechanical mixer. Then slowly add approximately 1/2 gallon of water to reach a proper consistency, for application and mix another 5 minutes.

APPLICATION:

For application on joints use manual hand tools, taping banjos, or automatic taping tools. Suitable for use with paper tape joint reinforcements. NOT recommended for use with fiberglass mesh tapes. For application as texture may be rolled or sprayed with hopper guns or other suitable spray equipment. Should work need sanding it is recommended to wet-sand, or use vacuum sander to limit generating airborne dust. Do not exceed recommended coverage (200 linear foot per bag) as this will lead to poor hide, color differences, and variations in base suction. Two coats may be required on extremely porous surfaces. Let first coat dry thoroughly before applying second coat.

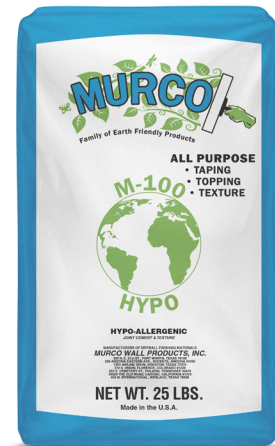

PRODUCT DATA:

Color Bright White

Drying Time Dries to touch in 30 to 60 minutes (depending on air temperature and humidity)

Storage Store in a cool, dry place and seal open bags.

Packaging 25 lb. bag

Coverage M 100 covers 200 linear ft per 25 lb bag depending on desired finish.

PRECAUTIONS:

DO NOT ingest. A NIOSH approved nuisance dust respirator should be used if the air is dusty.

CAUTION: KEEP OUT OF REACH OF CHILDREN

DO NOT TAKE INTERNALLY

DO NOT FREEZE

MADE IN THE U.S.A